

PERFORATED ROLLING DOOR

MODEL

Perforated coiling security shutters offer a clean, uncluttered view that maintains a high level of security while eliminating the claustrophobic effect of being “closed-in”. Typical applications included: storefronts, office windows, shopping malls, display cases, ventilated areas and many more applications.

SPECIFICATIONS

LISTINGS

- Meets city visibility code requirement. Due to the perforated curtain this door does not qualify for wind, fire, smoke and/or sound rating.

SLATS

- Manufactured from 2.5” wide metal slats roll formed to interlace together to create a continuous steel curtain.
- Also available in 1.5” wide for counter shutter applications or to meet astringently small headroom requirements.

CURTAIN

- Perforation available in square or round pattern design.
- Pattern is available in regular or micro-perforations.
- Both perforation sizes conform to city visibility requirements.

OPERATION

- Motor, Chain, Hand-Crank or Push-Up operation available based on size, weight or frequency of operation.
- Battery backup available to ensure operation in the event of power failure or blackout.

MATERIALS & FINISHES

- Curtains have typical exterior finish in Clear Anodized, White, Grey and Galvanized.
- Additional options include: Stainless Steel and Powder-Coated.
- Exterior skin is available in 24, 22, 20 and 18 gauge.
- For perforated doors the gauge is typically determined by door size. For more information consult factory.



BOTTOM BARS

- Bottom Bar options include: Single Angle, Double Angle, Tubular (extruded aluminum) or “T” bottom bar.
- Bottom Bars have typical Mill Finish.

LOCKING

A. Chain Operation: Wall mounted chain keeper or zinc plated steel slide bolt with padlock provisions.

B. Push-Up or Hand-Crank Operation: Slidelocks, Round Locks or Cylinder Locks for locking at bottom bar (bottom bar design effects locking option available).

C. Motor Operator: No additional locking required as motor has automatic feature to prevent door from being lifted.

HOOD & COVERS

- Hoods are typically furnished if the coil is exposed. If provided, hoods are Steel Galvanized Finish.
- Additional Finish Options: Stainless Steel, Galvalume, Prime Painted and Powder-Coated.
- Standard shape is round cover; options for square or hexagonal upon request.
- Covers can be provided for all exposed mechanical parts.
- Motor cover available for preventing weather intrusions and security protection.


CONTACT US

Best Rolling Manufacturer, Inc. P: 305-698-3550
9780 NW 79 Avenue F: 305-698-3552
Hialeah Gardens, FL 33016 www.bestdoor.us

PERFORATED ROLLING DOOR

PARTS & ACCESSORIES

COMPONENTS

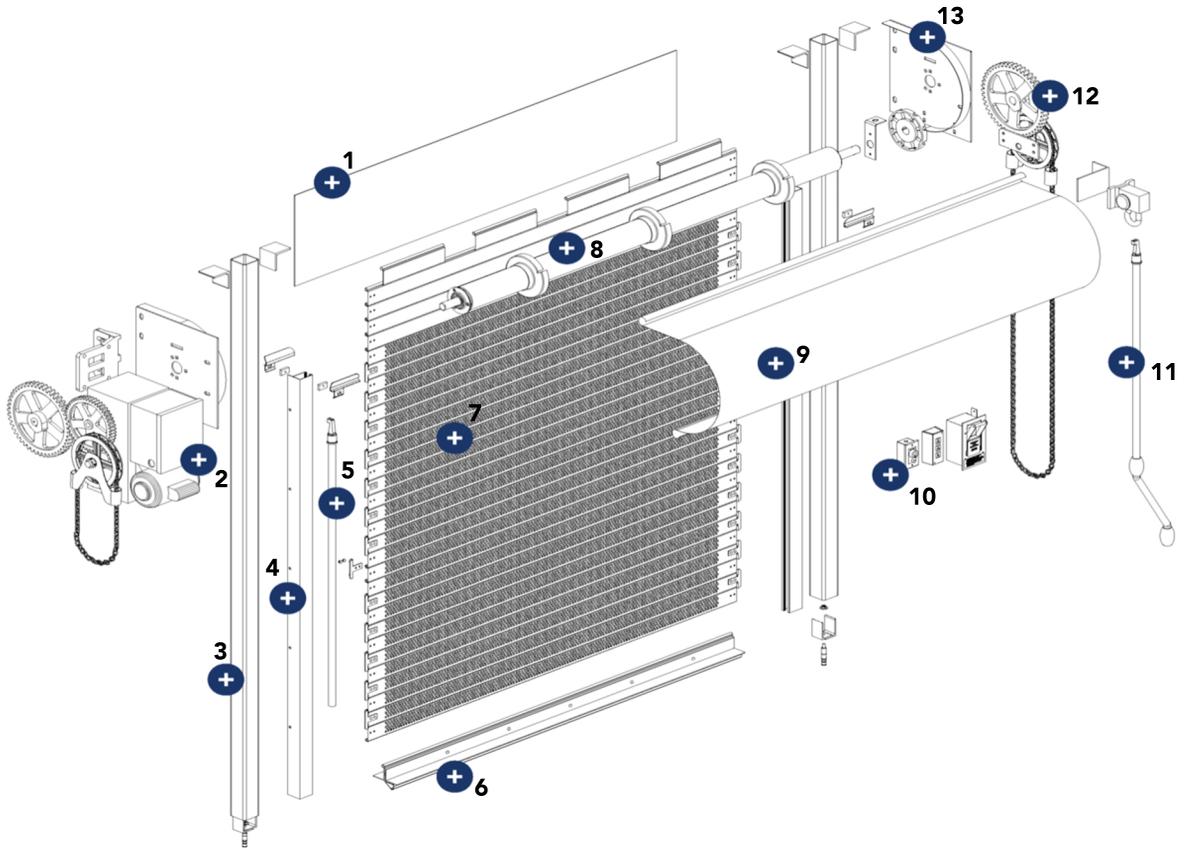

1. **FASCIA** - Optional for installations with no header to cover exposed coil.
2. **MOTOR OPERATION** - Additional types and configuration available based on job type.
3. **STEEL TUBE SUPPORTS** - Provided for installation when there is not a jamb.
4. **GUIDES** - Additional types and configuration available based on job type.
5. **PUSH-UP OPERATION** - Pull hook provided.
6. **BOTTOM-BAR** - Additional types, finishes and locking options available.
7. **CURTAIN** - Available in regular or micro perforations. Both options in accordance with code for visibility requirements.
8. **TORSION-SPRING PIPE ASSEMBLY**
9. **COVER** - Standard round shape, supplied when coil is exposed.
10. **OPERATION ACCESSORIES** - Additional accessories and finishes available.
11. **CRANK OPERATION** - Allow for minimum 2.0" sideroom .
12. **CHAIN OPERATION** - Allow for minimum 5.0" sideroom clearance.
13. **HEADPLATE** - Size varies based on door dimensions.